
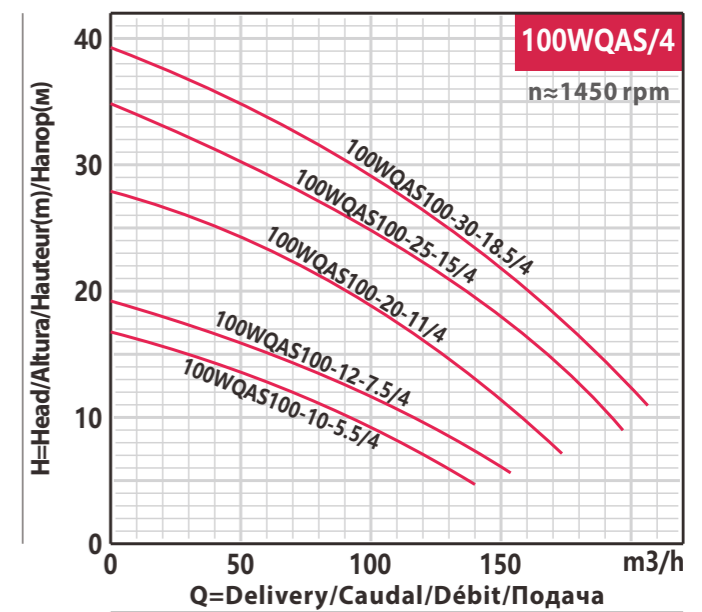
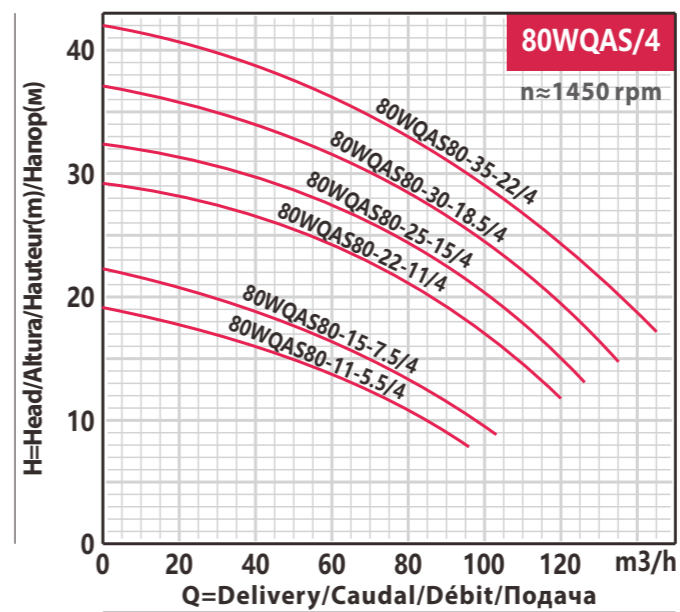
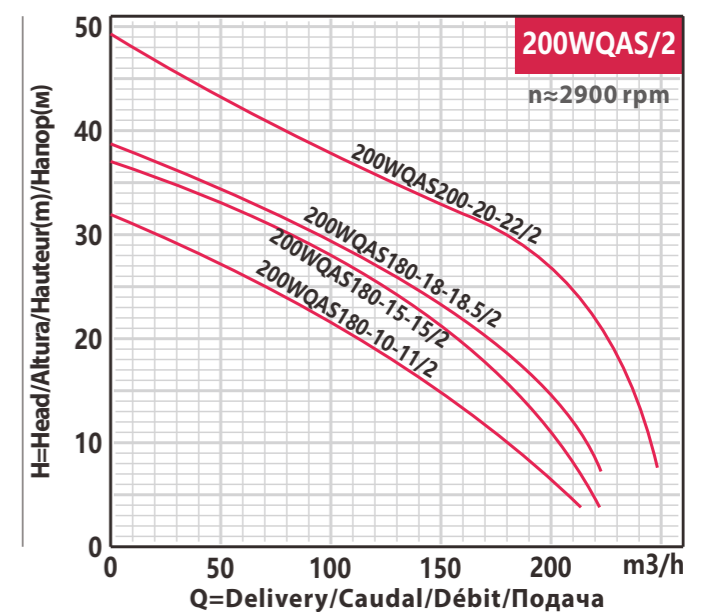
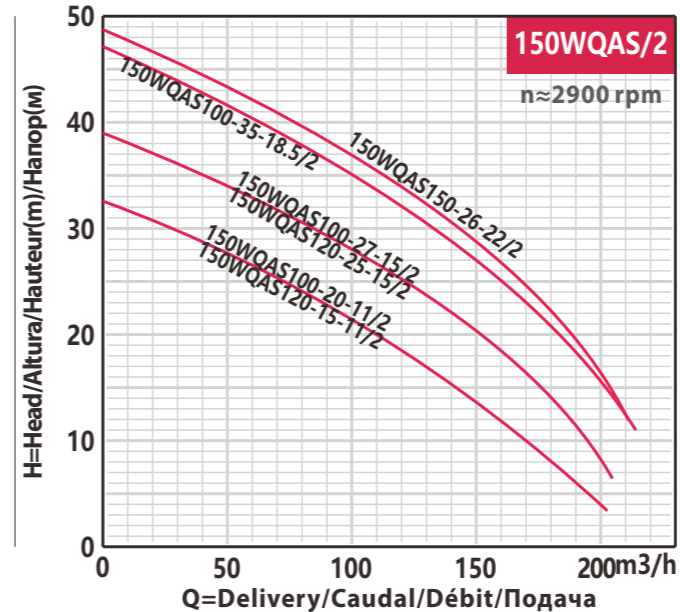
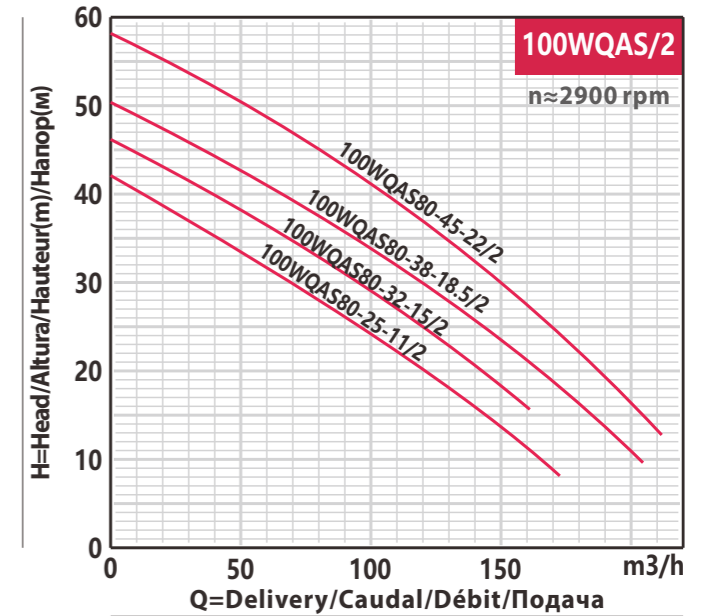


TECHNICAL DATA/DATOS TÉCNICOS/DONNÉES TECHNIQUES/ТЕХНИЧЕСКИЕ ДАННЫЕ

50Hz n≈1450l/min

MODEL MODELO MODÈLE МОДЕЛЬ	DN mm	Power Potencia Puissance Мощность				Q=Delivery/Caudal/Débit/Подача																							
		kw	hp			Amp.	mm	GPM	0	441	529	793	881	1101	1189	1322	1762	1982	2203	2423	2643	2863	3084	3524	3965	4185	4405	4626	4846
								l/min	0	1667	2000	3000	3333	4167	4500	5000	6667	7500	8333	9167	10000	10833	11667	13333	15000	15833	16667	17500	18333
		m³/h	0			100	120	180	200	250	270	300	400	450	500	550	600	650	700	800	900	950	1000	1050	1100				
H=Head(m)/Altura(m)/Hauteur(m)/Общий напор в метрах водяного столба (м)																													
100WQAS120-40-30/4	100	30	40	56.6	ø20	48	41	39	30	26.5	15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
100WQAS120-45-37/4	100	37	50	69.6	ø20	53	47	45	37	33.5	22.5	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
100WQAS100-55-45/4	100	45	60	84.4	ø20	61	56	54	45	42.5	33	29	21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
100WQAS100-65-55/4	100	55	75	102.7	ø20	73	65	62.5	54	50.5	41	36	29	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
150WQAS180-28-30/4	150	30	40	56.6	ø30	35	-	30	27.5	26	23	21	19	10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
150WQAS200-32-37/4	150	37	50	69.6	ø30	41	-	36	33	32	29	27.5	25.5	17.5	12.5	-	-	-	-	-	-	-	-	-	-	-	-	-	
150WQAS200-36-45/4	150	45	60	84.4	ø30	46	-	40	37	36	33	32	30	23	18	14	-	-	-	-	-	-	-	-	-	-	-	-	
150WQAS180-40-55/4	150	55	75	102.7	ø30	49	-	44	41	40	37	36	34	26	22	17	12	-	-	-	-	-	-	-	-	-	-	-	
150WQAS200-57-75/4	150	75	100	136.3	ø30	66	-	62	58	57	54	52	50	38	28	8	-	-	-	-	-	-	-	-	-	-	-	-	
150WQAS200-60-90/4	150	90	125	170	ø30	70	-	65	62	61	58	56	54	42	30	-	-	-	-	-	-	-	-	-	-	-	-	-	
150WQAS180-70-110/4	150	110	150	196.8	ø30	78	-	73	70	68	65	64	61	50	38	-	-	-	-	-	-	-	-	-	-	-	-	-	
200WQAS250-22-30/4	200	30	40	56.6	ø40	34.5	-	-	-	28	25.5	24.5	23	16	11.5	7	-	-	-	-	-	-	-	-	-	-	-	-	
200WQAS300-28-37/4	200	37	50	69.6	ø40	40.5	-	-	-	33.5	31	30	28	21	16	10	-	-	-	-	-	-	-	-	-	-	-	-	
200WQAS350-25-37/4	200	37	50	69.6	ø40	40.5	-	-	-	33.5	31	30	28	21	16	10	-	-	-	-	-	-	-	-	-	-	-	-	
200WQAS300-30-45/4	200	45	60	84.4	ø40	41.5	-	-	-	34.5	32	31	30	24	20	16	11	-	-	-	-	-	-	-	-	-	-	-	
200WQAS400-25-45/4	200	45	60	84.4	ø40	41.5	-	-	-	34.5	32	31	30	24	20	16	11	-	-	-	-	-	-	-	-	-	-	-	
200WQAS300-35-55/4	200	55	75	102.7	ø40	44	-	-	-	39	37	36	35	28.5	25	21	16	11	-	-	-	-	-	-	-	-	-	-	
200WQAS400-30-55/4	200	55	75	102.7	ø40	44	-	-	-	39	37	36	35	28.5	25	21	16	11	-	-	-	-	-	-	-	-	-	-	
200WQAS350-45-75/4	200	75	100	136.3	ø40	54	-	-	-	50	48	47	46	40	37	33	28	22	-	-	-	-	-	-	-	-	-	-	
200WQAS300-50-90/4	200	90	125	170	ø40	58	-	-	-	52	50	50	48.5	43	39	35	30	24	16	-	-	-	-	-	-	-	-	-	
200WQAS400-43-90/4	200	90	125	170	ø40	58	-	-	-	52	50	50	48.5	43	39	35	30	24	16	-	-	-	-	-	-	-	-	-	
200WQAS300-55-110/4	200	110	150	196.8	ø40	66	-	-	-	60	58	58	56	51	48	44	39	33	26	-	-	-	-	-	-	-	-	-	
250WQAS500-10-30/4	250	30	40	56.6	ø50	23.5	-	-	-	-	-	17	14	12.5	11	9.5	8	7	5.5	3.5	2	-	-	-	-	-	-	-	
250WQAS600-8-30/4	250	30	40	56.6	ø50	23.5	-	-	-	-	-	17	14	12.5	11	9.5	8	7	5.5	3.5	2	-	-	-	-	-	-	-	
250WQAS600-12-37/4	250	37	50	69.6	ø50	28	-	-	-	-	20.5	18	16.5	15	13.5	12.5	11	9.5	6.5	3.5	-	-	-	-	-	-	-	-	
250WQAS600-15-45/4	250	45	60	84.4	ø50	29.5	-	-	-	-	23	20.5	19	18	16.5	15	13.5	12	9.5	5.5	4.5	3	-	-	-	-	-	-	
250WQAS600-20-55/4	250	55	75	102.7	ø50	36	-	-	-	-	29	26.5	25	23.5	22	20.5	19	17.5	14	10	8	5.5	-	-	-	-	-	-	
250WQAS600-25-75/4	250	75	100	136.3	ø50	42	-	-	-	-	34	31.5	30	29	27	25.5	24	22.5	19	15	12.5	10	8	-	-	-	-	-	
250WQAS600-30-90/4	250	90	125	170	ø50	44	-	-	-	-	38	35.5	34	32.5	30.5	29	26.5	25	21	16	13.5	10.5	8.5	-	-	-	-	-	
250WQAS600-40-110/4	250	110	150	196.8	ø50	52	-	-	-	-	46	43	41.5	40	38.5	37	35	33	29	24	21	17.5	13.5	10	-	-	-	-	
300WQAS700-8-30/4	300	30	40	56.6	ø60	25.5	-	-	-	-	-	16.5	15	14	12.5	11	9.5	8.5	5.5	3	1.5	-	-	-	-	-	-	-	
300WQAS700-11-37/4	300	37	50	69.6	ø60	29	-	-	-	-	18.5	17.5	16	15	13.5	12	11	8	5	4	3	-	-	-	-	-	-	-	
300WQAS800-12-45/4	300	45	60	84.4	ø60	32	-	-	-	-	23	21.5	20	19	17.5	16	15	12	9	7	5	-	-	-	-	-	-	-	
300WQAS800-15-55/4	300	55	75	102.7	ø60	33.5	-	-	-	-	25.5	24.5	23	22	21	19	18	15	12	10	8	6	4	-	-	-	-	-	
300WQAS800-20-75/4	300	75	100	136.3	ø60	41	-	-	-	-	31	29.5	28	27	25.5	24	23	20	16	13	10	6.5	-	-	-	-	-	-	
300WQAS800-25-90/4	300	90	125	170	ø60	44	-	-	-	-	35	33.5	32	31	30	28.5	27.5	25	22	19.5	17	13	-	-	-	-	-	-	
300WQAS900-30-110/4	300	110	150	196.8	ø60	52	-	-	-	-	41.5	40.5	39.5	38.5	38	37	36	33.5	30	27.5	25	20	15	-	-	-	-	-	

PERFORMANCE CURVE / CURVA DE RENDIMIENTO / COURBE DE PERFORMANCE / КРИВАЯ ПРОИЗВОДИТЕЛЬНОСТИ

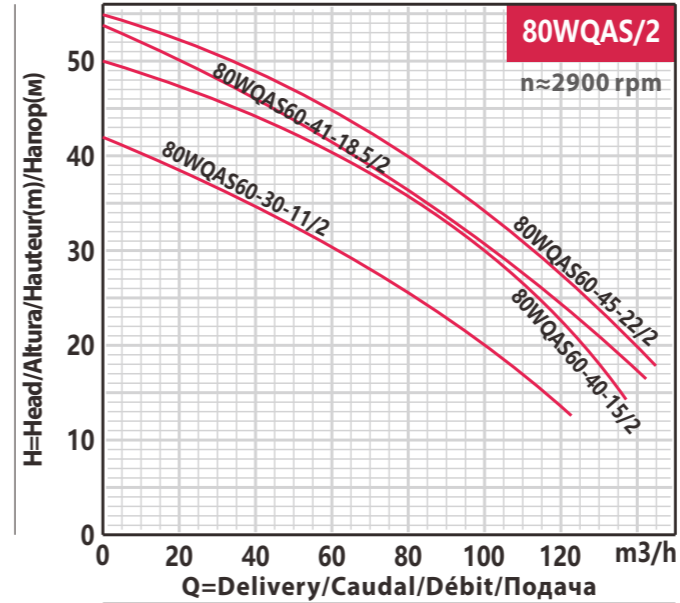

PERFORMANCE CURVE/CURVA DE RENDIMENTO/COURBE DE PERFORMANCE/КРИВАЯ ПРОИЗВОДИТЕЛЬНОСТИ

PERFORMANCE CURVE/CURVA DE RENDIMENTO/COURBE DE PERFORMANCE/КРИВАЯ ПРОИЗВОДИТЕЛЬНОСТИ

